



The  
Patent  
Office

GB99/1594

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

09/786036

PCT/GB99/01594



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport

South Wales  
NP9

28 JUL 1999

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

16.6.99

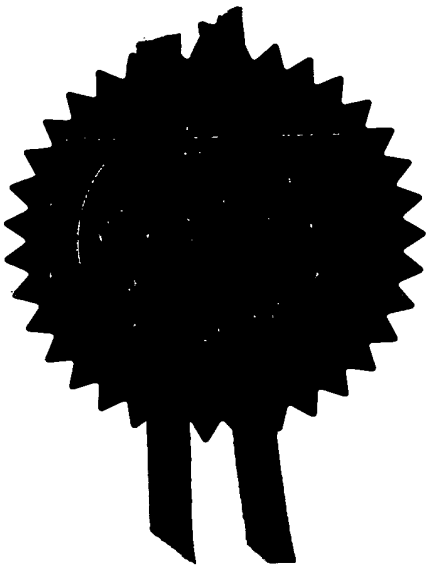

**THIS PAGE BLANK (USPTO)**


The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference	P/61453.GBA/EO		
2. Patent application number (The Patent Office will assign a number if you do not)	9818949.1		-1 SEP 1998
3. Full name, address and postcode of the or of each applicant (underline all surnames)	GEC-MARCONI LIMITED THE GROVE WARREN LANE STANMORE MIDDLESEX HA7 4LY  Patents ADP number (if you know it)  If the applicant is a corporate body, give the country/state of its incorporation		
	UNITED KINGDOM  4178331001		
4. Title of the invention	CAMERAS		
5. Name of your agent (if you have one)	J WATERS		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	GEC PATENT DEPARTMENT WATERHOUSE LANE CHELMSFORD ESSEX CM1 2QX  Patents ADP number (if you know it)		
	50732005 ✓		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body See note (d))	YES		

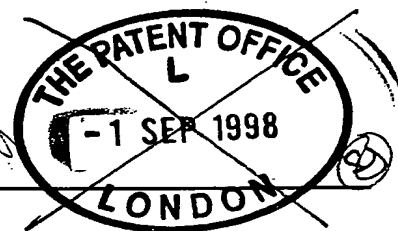

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form 0

Description 16

Claim(s) 3

Abstract 1

Drawing(s) 3 + 3 <sup>88</sup>

10. If you are also filing any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 2

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 0

Any other documents (please specify) 0

11. I/We request the grant of a patent on the basis of this application.

Signature

*J Waters*  
J WATERS

Date 28.08.98

12. Name and daytime telephone number of person to contact in the United Kingdom

J WATERS 01245 275451

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*

CAMERAS

This invention relates to cameras.

The invention is especially concerned with the dynamic range of such cameras.

5 TV cameras such as TV broadcast cameras, CCTV, domestic video cameras, are provided with various servo mechanisms to enable satisfactory video signals to be produced from the imaging device, usually a CCD sensor, from a wide range of scene illuminations. The most common servo mechanism is an auto-iris, and in fact these can cope with a large dynamic range, particularly if a transparent plate with an attenuating  
10 region or regions in the iris plane, denoted a spotted iris, are employed. The tendency has however been for the dynamic range between different scene illuminations (inter-scene) to be dealt with by electronic shuttering. This means that in scenes of lower illumination, the CCD or other sensor is exposed for a full field of 20 milliseconds (ms) but with higher illumination the imager is gated so as to be exposed for perhaps  
15 only 2 microseconds ( $\mu$ s).

Variations of illumination within a scene (intra-scene) present more problems. In a scene in which part is brightly illuminated and part is in shadow, if the region of shadow is of interest, then, if this signal is to occupy the full dynamic range of the  
20 camera then the signals corresponding to the brightly illuminated region would greatly exceed the dynamic range of the camera, and therefore must either be clipped at peak

level, thereby discarding the detail in the bright region, or compressed, thereby greatly reducing the details in the dark region.

A multi-exposure technique has been demonstrated to overcome this problem. CCD sensors are gated to take two exposures of the same scene with different sensitivities e.g. 100:1 ratio. For example, alternate fields could be gated at 20 ms and 200  $\mu$ s. Combining these two fields produces a compressed picture. This technique is used for example when broadcasting sports events in which the action moves between one part of the ground in full sunlight and another part in shadow.

A drawback however is that the vertical resolution and temporal resolution are reduced with this technique.

Intra-scene dynamic ranges are of course decreased if the CCD sensor is used in conjunction with an image intensifier (ICCD), since the noise level is now increased. In this case, imaging of scenes illuminated by starlight would be possible. Such an ICCD sensor has been disclosed in our patent application no. GB-A-2 318 012, in which coloured stripes were placed in front of the image intensifier, and processing electronics were used, to enable a monochrome sensor to produce a colour image.

If the double gating technique was extended to ICCDs as well as CCDs, there would be limitations about how fast the two exposures could be alternated. For example, if it was decided to expose twice within a field to reduce loss of vertical resolution, this

might not be possible because of phosphor lag in the image intensifier. This is because an image intensifier has a photocathode on which an image is focussed, means such as a micro-channel plate to multiply the number of electrons generated at the photocathode, and an anode on which the electrons impinge. The anode is coated with a phosphor to generate an optical image which is then picked up by a CCD. There is a limitation as to how fast the intensity of illumination of the phosphor can change.

The problem of double exposure with intensifiers could be solved by an arrangement of two intensifiers and a beam splitter passing, say, 90% intensity to one intensifier and 10% to the other. However, the cost and bulk of the camera would then increase, and the intensifier receiving the greater intensity of illumination would require replacement at more frequent intervals than the other.

The invention provides a camera comprising a sensor for receiving radiation representative of a scene, filter means arranged to attenuate the radiation reaching different spatial regions of the sensor to different extents, and decoding means arranged to combine the contributions to the output of the sensor from the different regions, to produce an output of extended dynamic range.

The invention permits the disadvantage of reduced vertical resolution and temporal resolution to be avoided without recourse to using two image intensifiers.

The attenuating regions of the filter are preferably arranged in stripes, preferably non-

parallel to the lines of the sensor, preferably inclined at around  $45^\circ$  to the lines. Analogue comb filters are preferably used to decode the encoded video signal produced by the sensor.

5 The reference to filter means attenuating to a different extent includes total attenuation (opaque), zero attenuation (transparent), and any degree between opaque and transparent, and also includes attenuation by neutral density, by colour, or by polarisation.

10 The invention also provides a camera comprising a sensor for receiving radiation representative of a scene, filter means arranged to attenuate the radiation reaching different spatial regions of the sensor to different extents, and decoding means arranged to combine the contributions to the output of the sensor from the different regions, to produce an output of expanded contrast.

15

Cameras constructed in accordance with the invention will now be described in detail, by way of example, with reference to the accompanying drawings, in which:

Figure 1 represents a subject it is desired to image, in which the subject has full  
20 contrast and there are no highlights;

Figure 2 represents a scene which is actually to be imaged, wherein highlights present reduce the contrast on the subject to a low level;



Figure 3 represents a low sensitivity image of the scene of Figure 2;

Figure 4 represents a high sensitivity image of the scene of Figure 2;

5 Figure 5 represents a combination of the images of Figures 3 and 4;

Figure 6 is a block diagram of the camera;

Figure 7 represents a typical line of encoded video signal;

10

Figure 8 represents an optical filter bearing a stripe pattern overlying the sensor of the camera;

15 Figure 9 shows a filter to extract the peak level of the encoded video without the influence of the stripes;

Figure 10 shows a filter to extract a signal representative only of the stripes from the encoded video signal;

20 Figure 11 shows a circuit for demodulating the output representative of the stripe pattern;

Figure 12 is a block circuit diagram of the decode electronics to produce a compressed

video signal; and

Figure 13 shows a portion of the sensor of the camera showing a number of lines  
the sensor on which are superimposed the image of the optical filter together with a  
5 representation of the brightness variation produced on the video signal by the stripe  
pattern, any distortion of the image intensifier being ignored.

Referring to Figures 1 to 5, the aim is to produce a high contrast image of a subject 1  
(Figure 1), when the subject is viewed in the presence of a bright light 2, which has  
10 the effect of reducing the contrast on the subject to a very low level. This is achieved  
by imaging the scene at two different sensitivities. Thus, a low sensitivity image  
(Figure 3) is produced, as well as a high sensitivity image (Figure 4), and the two are  
combined to produce a compressed image, which shows a full range of contrast in the  
subject, but which nevertheless shows detail in the light as well.

15

In accordance with the invention, the images of different sensitivities are produced  
simultaneously by means of an optical filter (Figures 8 and 13) which attenuates the  
radiation reaching various spatial regions of a sensor. Thus, referring to Figure 6, the  
TV camera of the invention comprises a lens 3 arranged to image a scene onto the  
20 image plane of an ICCD, at which the stripes of an optical filter 4 in contact with the  
ICCD, are in focus. Electrical circuit 6 processes the output of the ICCD, which is a  
video signal which simultaneously contains a low sensitivity and a high sensitivity  
representation of the scene being viewed. This encoded video signal is decoded in

Decode Electronics 7 to produce a compressed image as in Figure 5.

Referring to Figures 8 and 13, the stripes are inclined and of such an density as to attenuate the incident radiation to 1% of incident intensity. The filter is clear between  
5 the stripes allowing 100% of incoming radiation through.

It will be appreciated that if the camera was imaged on a scene of uniform intensity, the video signal for each line would consist of an approximately sinusoidal oscillation, corresponding to the pitch of the stripes 8 (Figures 8 and 13) in the scan direction, with  
10 the envelope of the peaks of the sinusoids being level (i.e. the peaks having the same amplitude) corresponding to light illumination through the transparent regions between the stripes 8, and the envelope of the troughs of the sinusoids also being level and corresponding to light transmission through the stripes 8 themselves. Note that the video signal would have an approximately sinusoidal fluctuation, as represented in  
15 Figure 13, rather than the square wave shape of the optical filtering on the line of the imager, because of filtering in the processing circuits.

In the imaging of an actual scene, the envelopes of the peaks and troughs of the sinusoids for each line will not be level. The envelope of the peaks of the sinusoids  
20 (A) for any particular line will correspond to the variation of spatial intensity of the high sensitivity image of Figure 4, while the envelope of the troughs of the sinusoids (B) will correspond to the variation of spatial intensity of the low sensitivity image of Figure 3. Thus, referring to Figure 2 and Figure 7, for one particular line, the part of

the envelope A denoted by  $A^1$ , corresponds to a high sensitivity image of the subject 1 in Figure 2 i.e. as seen through the transparent region between the stripes, whereas the part of the envelope A denoted by  $A^2$ , corresponds to the image of the light as seen through the transparent regions. The envelope  $A^1$  varies and contains details of the intensity of the subject, while the part of the envelope  $A^2$  is level since it has been clipped and therefore does not contain any detail of the light source 2. This corresponds to the image of Figure 4.

The part of the envelope B denoted  $B^1$  corresponds to the low sensitivity view of the image 1 seen through the stripes, and is of such a low value as to barely be above the noise threshold. The part of the envelope  $B^2$  is a low sensitivity image of the light 2 and corresponds to the light imaged through the stripes 8. This does contain detail. This corresponds to the image of Figure 3.

The encoded video signal records the envelope of the peaks A and also the depth of the oscillation ( $B - A$ ).

The decode electronics 7 is shown in more detail in Figure 12 and consists of analogue comb filters 9 and 10 and demodulator 11. The optical filter 4 is imaged on the CCD sensor, and Figure 13 shows, on an enlarged scale, a portion of the filter pattern superimposed on four lines of a field  $L_n$  to  $L_{n+3}$  of the CCD sensor, together with a representation of the sinusoidal variation of intensity produced on the lines of the video signal by the image of the optical filter.

Referring to Figure 13, the attenuating stripes (B for "black") alternate with non-attenuating stripes (W for "white"), but there is one more of one sort than the other.

Such a situation applies in Figure 13, although of course in reality there would be many more pairs of attenuating and non-attenuating stripes. The reason for the extra stripe is so that the intensity modulation impressed on, say, line  $L_{n+1}$  will follow on continuously from that impressed on line  $L_n$ . In the example shown, the last section of line  $L_n$  is non-attenuating, so the first section of line  $L_{n+1}$  is attenuating.

The sensor operates in a progressive scan mode i.e. lines  $L_n, L_{n+1}, L_{n+2}, L_{n+3}$  are consecutive and there is no interlacing.

The decode electronic 7 operates in the following manner. In order to produce envelope A corresponding to the brightness of the high sensitivity image but with the stripe pattern removed, a transversal filter such as an analogue comb filter 9 sums the signals corresponding to adjacent lines e.g.  $L_n, L_{n+1}$  in analogue comb filter 9. This is achieved by adder 12 which sums the input directly received via link 14 and received via delay 13 which corresponds to one TV line ( $64\mu s$ ). Referring to Figure 13, since the stripe pattern is in anti-phase on adjacent lines, the attenuation produced by this cancels, leaving only the brightness variation representative of the scene, which is reinforced since two lines are added. The output of comb filter 9 is thus output 2A.

The reason why the stripe pattern intensity is in anti-phase on successive lines is that the stripe pattern is inclined at  $45^\circ$  to the lines, and successive lines are spaced by half

the wavelength of the stripe pattern.

In order to produce an output representing the difference between the modulated envelopes A and B, i.e.  $|A - B|$ , a transversal filter such as the comb filter in Figure 5  
10 subtracts adjacent lines e.g.  $L_{n+3}$ ,  $L_{n+2}$  to remove the overall brightness level of the scene whilst reinforcing the sinusoidal form of the stripe intensity modulation. Adjacent lines are subtracted at subtractor 15 by means of direct link 17 and delay 16 corresponding to one TV line ( $64\mu s$ ). The output of this filter is the modulation corresponding to the depth of modulation of the sinusoids of the stripe pattern i.e.  $|A -$   
10  $B|$ . This signal is demodulated in diode detector 11 consisting of diode 18 and RC smoothing circuit 19, 20.

These two signals are combined at subtractor 21 (Figure 12). Since the output of the comb filter 9 is double the intensity of the scene, the resulting output from the decode  
15 electronic is the summation of the two envelopes A and B i.e. the required compressed image of Figure 5.

The sensitivity loss of having only half the sensor area fully sensitive is partly restored by the comb filtering benefits of noise i.e. 3db for single comb filter, 4.8db for a  
20 double filter.

Improved resolution can be obtained by the use of a third delay line 22 (delay  $64\mu s$ ), shown dotted, the output of which is demodulated by a demodulator similar to that

shown in Figure 11 but shown symbolically by diode 23. As an example, consider the arrival of line  $L_{n+2}$  at the input of comb filter 10. At the subtractor 15, line  $L_{n+1}$  is subtracted from it. The amplitude of the stripe pattern modulation is increased. At the diode 11, only positive half cycles are passed i.e. the first, the third etc. At the same time, diode 23 is passing the positive cycles of the difference between lines  $L_{n+1}$  and  $L_n$ , this time only the second, fourth etc. half cycles. Thus, signal A-B is represented with increased resolution by combining signal A-B from diode detector 11 with signal (A-B)' from diode detector 23, so that there is signal present on each half cycle. Whereas the resolution of the low sensitivity signal A - B has a bandwidth of approximately 1.8MHz, (the stripe pattern having a resolution of 3.5MHz), addition of the delayed stripe pattern (A - B)' gives a resolution of 3.5MHz.

With a typical CCD array of 600 x 600 pixels, the filter may consist of 300 neutral density stripes alternating with transparent regions of the same width as the stripes, subject to there being one more or less neutral density than transparent stripe across the length of each line. The stripes are arranged at the image plane of the ICCD in such a way that when their shadow is cast on the CCD array, the stripes are orientated at 45° to the lines of the CCD array  $L_n$  etc. It is critical that the lines are aligned with each other for the purposes of the comb filters, but manufacturing tolerances mean that the stripes will not be arranged at exactly 45° to the lines of the CCD, manufacturing tolerances might also dictate that there are slightly more or less than 300 stripes crossing the top or sides of the CCD array, and there may also be slight uncertainties in the crystal frequency of the camera which is used to generate the line frequencies

etc. It is for this reason that, during manufacture, the delay lines 13, 16 and 22 are trimmed in order to get an exact one line delay of  $64\mu\text{s}$  between adjacent lines, and this can be done using a oscilloscope on the output 21.

5 It will be appreciated that other inclinations of the stripes to the ICCD lines are possible, so long as they are not vertical, since in this case there would not be a phase difference between one line and the next for the stripe modulation pattern, and its effects could not be removed. It will merely be necessary to trim the delay lines 13, 16 and 22 so that the modulation patterns of consecutive lines is in anti-phase to each other. Also, it is not necessary for the stripes to alternate with equal widths of  
10 transparent areas. Other mark/space ratios are possible. Further, the stripe filter need not be positioned at the focal plane of the ICCD, it may be positioned anywhere in the path of radiation onto the CCD sensor e.g. using relay lenses, so long as it is in focus on the image plane and may in fact be formed directly on the CCD sensor. Further,  
15 it is not necessary for there to be the same number of stripes and transparent areas as there are lines of the sensor, there could be more or less stripes and alternating transparent regions than there are lines of the sensor.

In the embodiment described, the stripes only allow through 1% of light intensity. Of  
20 course, different densities are possible, and even the transparent region could be replaced by an attenuating region of different properties. In fact, opaque stripes i.e. 100% attenuation e.g. of aluminium, could be employed. Even though these stripes allow no light through at all, nevertheless there is a contribution to the output of the



sensor, namely, due to noise  $\left(\frac{1}{f}\right)$  particularly generated in the image intensifier but also in the CCD. This noise signal provides a black level reference which can be subtracted from the contribution to the output from the transparent regions, to compensate for temperature and  $\left(\frac{1}{f}\right)$  noise.

5

Also, it is not necessary for the stripes to be of neutral density. They could be one particular colour e.g. blue, which would attenuate incandescent lights which radiate a large amount of red light.

10

Further, the stripes could be polarising, arranged to attenuate light of a particular polarisation. This could be a particular advantage in reducing reflections e.g. of light from a wet road surface.

15

Further, more than one set of stripes could be provided. For example, a second set of different attenuating properties could be provided on the optical filter at a different angle to the lines of the sensor. Indeed, further sets of lines could be provided with different attenuating properties. In particular, a set of opaque stripes could be arranged with a set of 1% attenuating stripes. With one set of stripes, they could be inclined to the vertical of the raster as seen in Figure 13 at  $22^\circ$ , a second set could be arranged at  $-22^\circ$  to the vertical, and a third set could be inclined at  $-45^\circ$  to the vertical.

20

For example, a combination of stripes of neutral density, coloured (e.g. dark blue) and opaque could be used. The benefit of the invention (picture compression and extended

dynamic range) would be both spectrally and scene responsive.

Further, one or more sets of stripes, provided to extend the dynamic range of the sensor in accordance with the invention, could be combined with coloured stripes as described in our earlier patent application no. 2 318 012 to produce a colour or pseudo colour output from a monochrome sensor. Indeed, two sets of coloured stripes could be provided; a first set of one attenuation to produce the colour output, and a second set of greater attenuation (the same colour but greater density) to extend the dynamic range. These could be set at different angles to the first set.

10

Variations may be made on the encoding (stripe patterns) and decoding to produce the signals A, A - B, (A - B)'. There are benefits to be gained by using more sophisticated filtering in the decode electronics block 7. For example, double delay filters or triple delay filters may be used.

15

The regular pitch of the stripes gives the option of demodulation of the encoded video by the use of a circuit tuned to the frequency of the stripes.

20

In the described embodiment using ICCD, the image intensifier used produces a distortion of only  $\frac{1}{2}\%$  at the CCD sensor. However, there are other image intensifiers which produce a much greater geometric distortion e.g. 10%, in which case the stripe pattern of Figure 13 would be distorted by the image intensifier. Another alternative which would be useful in this case, would be for the decode electronics to use a

memory map relying on stored signals to relate the pixels of the CCD sensor to the (distorted) stripe pattern falling on the CCD sensor, for example as described in our prior patent application no. 2 318 012. Indeed, if a memory map was used, the attenuating regions of the filter could be in any arrangement desired, not necessarily a stripe pattern.

As another alternative, it will be possible to modify the delay network to accommodate geometry distortion by providing a voltage variable delay having as its input a signal related to the geometric distortion of the ICCD. Non-linear tuned circuits e.g. level and/or frequency adaptive could be used e.g. to remove a low level stripe pattern.

The stripes may be placed in contact with the ICCD or a relay lens may be used to project their image onto the image plane of the ICCD.

In the embodiments referred to above, the imager is an ICCD. The ICCD sensor comprises as is well known a CCD array coupled e.g. by optical fibres to the phosphors on the output surface of an image intensifier. The striped pattern may be cemented to the front surface of the intensifier, possibly using a fibre optic coupling. However, the invention is applicable also to CCD sensors which are not intensified. Further the invention is applicable to monochrome or colour sensors. However, in fact a wide variety of imagers may be used such as a CMOS imager, a tube such as a vidicon or orthicon, sensors active in the UV region may be used, e.g. visible near infra-red or far infra-red. The invention has been described in relative to progressive

scanning, but is also applicable to interlace scan.

Furthermore the sensor may be a non-imaging sensor e.g. for an infra-red intruder alarm. Or the invention is applicable to optically-coupled thermal cameras in which  
5 the thermal signal is used to vary the intensity of light on a sensor e.g. by varying the polarising angle in a transducer.

The cameras described above are used for high contrast scenes where compression is desirable. Some scenes, of lesser contrast, will benefit from the invention as well.  
10 Very low contrast scenes, such as "misty" viewing conditions, will not show any benefit from the cameras. A small change to the cameras described above can accommodate very low contrast scenes. When the subtractor 15 in Figure 12 is changed to be positive i.e. an adder, the camera becomes an expander of contrast. Some imaging sensors have a non-linear compression response (e.g. specially fabricated CCD  
15 devices). These special devices could be converted to a linear response by using the expansion improvement. In fact, the cameras described above could be provided with a switch to enable the contrast expander option to be selected as desired.

**CLAIMS**

1. A camera comprising a sensor for receiving radiation representative of a scene, filter means arranged to attenuate the radiation reaching different spatial regions of the sensor to different extents, and decoding means arranged to combine the contributions to the output of the sensor from the different regions, to produce an output of extended dynamic range.
2. A camera as claimed in Claim 1, in which the sensor is arranged to produce an output representative of lines of the image, and the filter means comprises stripes orientated so that the lines of the stripes are inclined to the lines of the image.
3. A camera as claimed in Claim 2, in which the stripes are inclined at an angle within the range  $\pm(45^\circ \text{ to } 80^\circ)$  to the lines of the image.
4. A camera as claimed in Claim 3, in which the stripes are at approximately  $\pm 45^\circ$  to the lines of the image.
5. A camera as claimed in any one of Claims 1 to 4, in which the stripes are neutral density stripes.
6. A camera as claimed in any one of Claims 1 to 4, in which the stripes are opaque.

7. A camera as claimed in any one of Claims 1 to 4, in which the stripes are coloured.
8. A camera as claimed in any one of Claims 1 to 4, in which the stripes are polarising.
9. A camera as claimed in any one of Claims 2 to 8, in which the regions between the stripes are transparent.
10. A camera as claimed in any one of Claims 1 to 9, in which there are two or more sets of stripes, each have different attenuating properties, inclined at different angles to the lines of the sensor.
11. A camera as claimed in any one of Claims 1 to 10, in which the decoding means is arranged to combine successive lines of the image to reinforce the scene and cancel the contribution to the intensity of the stripes.
12. A camera as claimed in any one of Claims 1 to 11, in which the decoding means is arranged to combine successive lines of the image to cancel the contribution to the intensity of the scene and reinforce that of the stripes.
13. A camera as claimed in Claim 11 or Claim 12, in which the decoding means comprises one or more comb filters.

14. A camera as claimed in any one of Claims 1 to 13, in which the sensor is a CCD.

15. A camera as claimed in any one of Claims 1 to 14, in which the sensor includes an image intensifier.


16. A camera substantially as herein described with reference to and as shown in the accompanying drawings.

17. A camera comprising a sensor for receiving radiation representative of a scene, filter means arranged to attenuate the radiation reaching different spatial regions of the sensor to different extents, and decoding means arranged to combine the contributions to the output of the sensor from the different regions, to produce an output of expanded contrast.

ABSTRACTCAMERAS

A camera comprises a sensor 5 such as a CCD or ICCD for receiving radiation representative of a scene, filter means 4 such as an arrangement of parallel neutral density stripes, arranged to attenuate the radiation reaching the sensor, and decoding electronics such as comb filters which decode the encoded video output of the sensor, (consisting of a high sensitivity image in which the radiation on the sensor is not attenuated and a low sensitivity image in which it is), to produce a compressed video image, from which the pattern of the filter means has been removed.

(Figure 6)





1/3

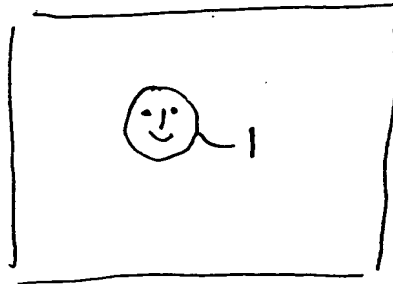


FIG 1

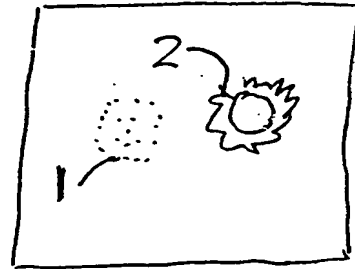


FIG 2

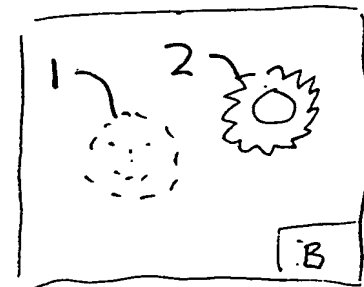


FIG 3

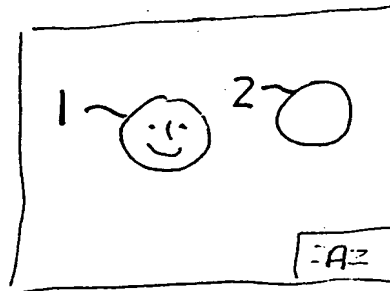


FIG 4

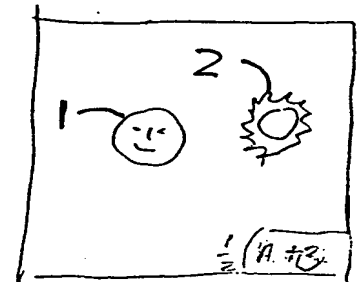


FIG 5

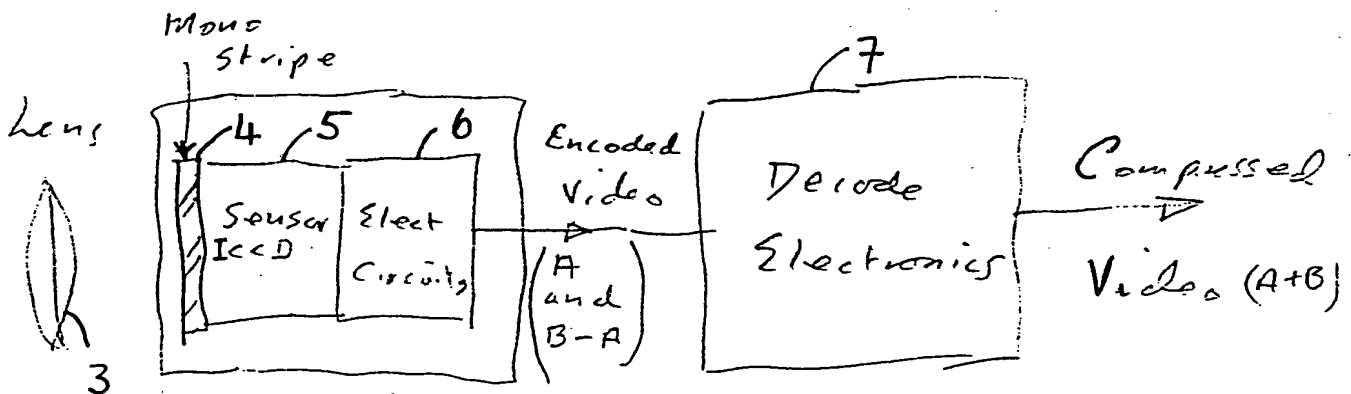


FIG 6

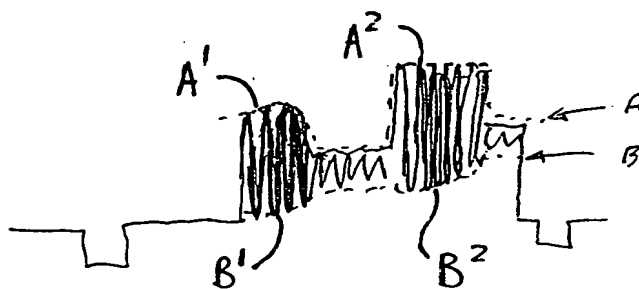


FIG 7





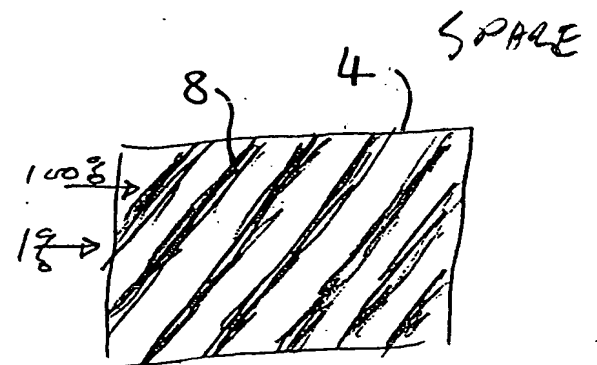


FIG 8

**THIS PAGE BLANK (USPTO)**

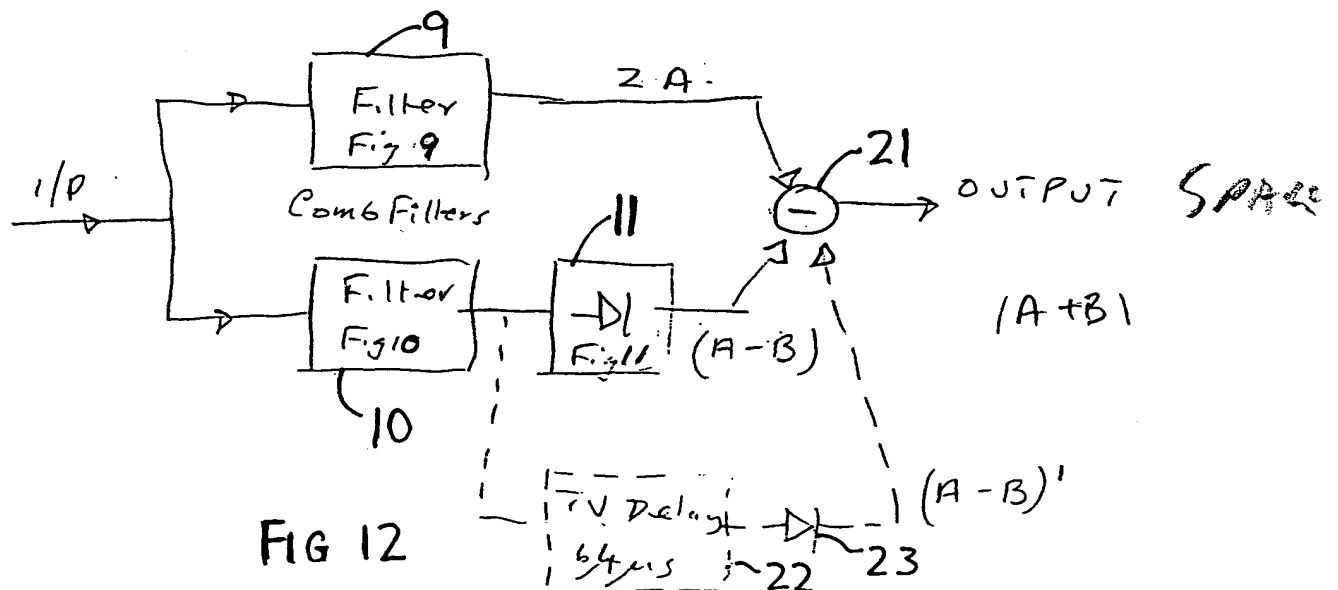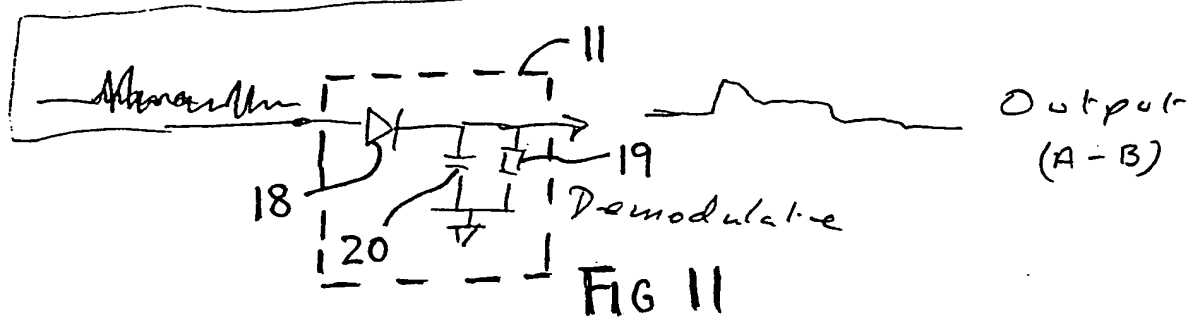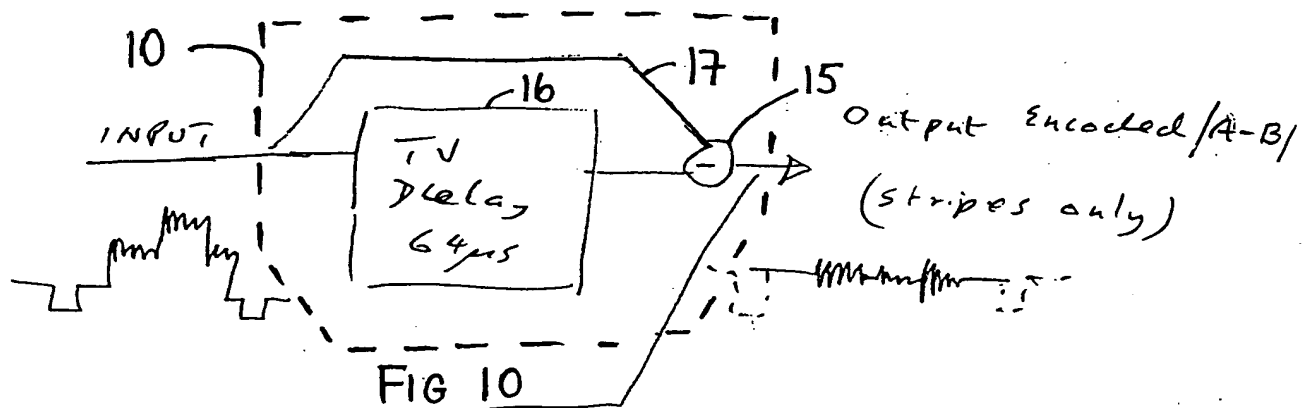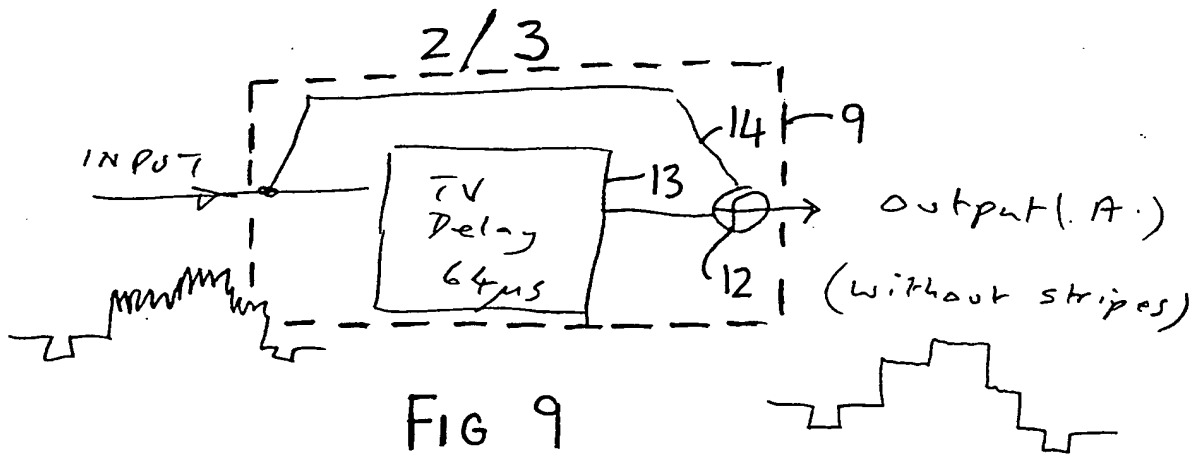

**THIS PAGE BLANK (USPTO)**

3/3

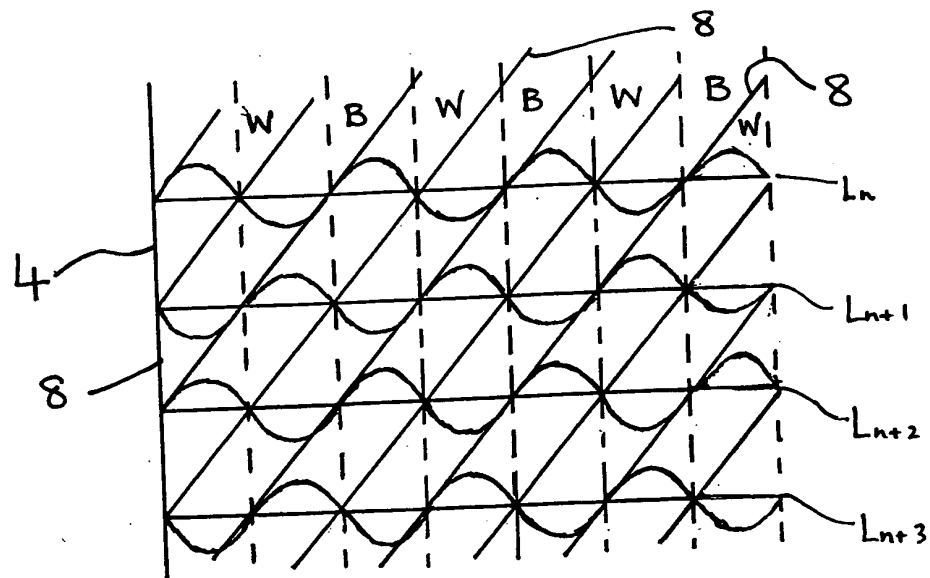


FIG 13

50PPE

PT/AB99/01514

GEC

20/5/99

**THIS PAGE BLANK (USPTO)**